

BOAB SOLUTIONS

BRIGHT IDEAS FOR YOUR 4x4



OLTD1 Eye Bolts

Eye Bolt tie down point (pair)
Fitted with 8mm stainless steel bolt and washer.
For use with tie down straps to secure loads. WLL 0.14T



OLTD2 Tie Down Ring

Great for use on roller drawer tops, trailers and utes to create a strong new tie down location that folds down when not in use.
WLL 250kg each



OLTD3 Flush Tie Down Ring

Recess into trailer or truck trays to provide a flush fitting very secure tie down point.
WLL of 1500kg



OLTD4 Load Rings (Pair)

Quick release load rings to suit Anchor Track. Anodised aluminium clip with stainless steel ring.
Supplied as a pair.
WLL ranges from 230-650kg depending on pull angle.



OLTD5 Load Ring and Base

Quick release load ring and smooth edge mounting base (no bolts supplied)
WLL ranges from 230-650kg depending on pull angle.




OLTD6 Anchor Track 150mm

A 150mm section of Anchor track pre-drilled in 3 locations
Load Ring and 2 bolts supplied.
Load Ring can be positioned along the track



OLTD7 Anchor Track 1 Metre

Machined aluminium extrusion with multiple locations into which the matching Load Rings can be inserted.
Load Rings (2 included) can be positioned anywhere along the Track.
Anchor Track can be mounted using countersunk head screws and nyloc nuts included.

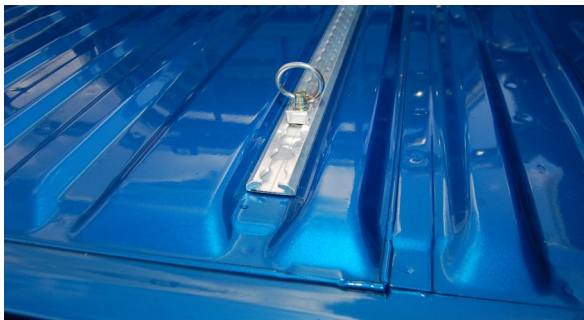

OLTD8 Anchor Track 2 Metre

Machined aluminium extrusion with multiple locations into which the matching Load Rings can be inserted.
Load Rings (not included) can be positioned anywhere along the Track



AVAILABLE FROM

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FOR MORE INFORMATION VISIT:

www.dolium.com.au